
Firma: PC COOL DOO
Adresa: Višegradska 26A
Telefon: 0653526116
Fax:
PIB: 104045201
E-mail: info@pccool.rs

Cudy GS1008PS2

Šifra: 29428
Kategorija prozivoda: Mrežna oprema
Proizvođač: CUDY

Cena: 7.660,00

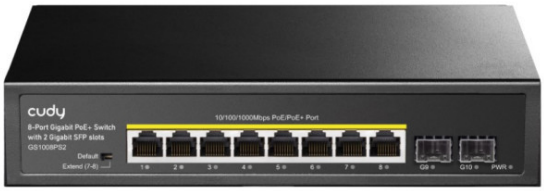

-8 x gigabit PoE+ ports and 2 x gigabit SFP slots
-120 watts total PoE power budget
-Extend mode(Port #7 ~ #8) supports PoE feeding up to 250 m

-IEEE 802.3af / 802.3at standard compliant
-IEEE 802.3X standard ?ow control
-Panel indicator monitoring status and help failure analysis

Power: AC100-240V50/60Hz
Ethernet: 8* Gigabit PoE Ports / 2* Gigabit SFP Ports
Chipset: 2*RTL8367S / RTL8238B
Bandwidth: 20Gbps
Pack forward rate: 14.88Mpps
MAC address: 2K
Jumbo Frame: 9216bytes
Transfer mode: Store and forward
MTBF: 100000 Hours
Network Protocol:
IEEE802.3 (10Base-T)
IEEE802.3u (100Base-TX)
IEEE802.3ab (1000Base-TX)
IEEE802.3x (Flow control)

PoE Protocol:
IEEE802.3af(15.4W)
IEEE802.3at(30W)

Industry Standard:
EMI: FCC Part 15 CISPR (EN55032) class A
EMS: EN61000-4-2 (ESD),
EN61000-4-4 (EFT),
EN61000-4-5 (Surge)

Network Medium:
10Base-T : Cat3, 4, 5 or above UTP(=100m)
100Base-TX : Cat5 or above UTP(=100m)
1000Base-TX : Cat5 or above UTP(=100m)

Optical Medium
Multimode optical fiber: 50/125, 62.5/125, 100/140um
Single-mode optical fiber: 8/125, 8.7/125, 9/125, 10/125um

LED Indicator: PWR (Power),1-10 Green Light (Link&Data)

PWR:
On: Powered on
Off: Powered off

1-10 Green Light (Link&Data)
On: Link normal
Off: Link blocked

Flashing: Data transmitting
DIP Switch
Default: common mode, all interfaces can communicate with each other, the transmission

distance is less than 100 meters, the transmission rate is 10/100/1000M adaptive; The port AI mode is disabled

Extend: Link extension mode, 7-8 ports force 10M, link 250M (enable POE watchdog)
Structure Size
Product Dimensions: 220*161*44mm
Package Dimensions: 315*215*85mm
Product N.W: 0.88kg
Product G.W: 1.38kg
Packing Info
Carton Dimensions: 445*445*335mm
Packing Quantity: 10 PCS
Packing Weight: 14.8KG
Input Voltage: AC 100-240 V 50-60Hz
Supply Power: 52V2.3A
Power Consumption <30W

Working Environment:

Cene su informativnog karaktera. Prodavac ne odgovara za tačnost cena iskazanih na sajtu, zadržava pravo izmena cena. Ponudu za ostale artikle, informacije o stanju lagera i aktuelnim cenama možete dobiti na upit. Plaćanje se isključivo vrši virmanski - bezgotovinski.