


Cudy GS1008PS2

Šifra: 29428

Kategorija proizvoda: Mrežna oprema

Proizvođač: CUDY

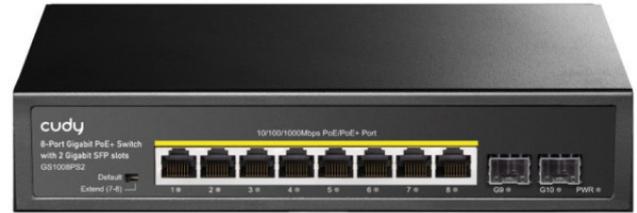

Cena: 7.730,00

- 8 x gigabit PoE+ ports and 2 x gigabit SFP slots
- 120 watts total PoE power budget
- Extend mode(Port #7 ~ #8) supports PoE feeding up to 250 m
- IEEE 802.3af / 802.3at standard compliant
- IEEE 802.3X standard flow control
- Panel indicator monitoring status and help failure analysis

Power: AC100-240V50/60Hz

Ethernet: 8* Gigabit PoE Ports / 2* Gigabit SFP Ports

Chipset: 2*RTL8367S / RTL8238B

Bandwidth: 20Gbps

Pack forward rate: 14.88Mpps

MAC address: 2K

Jumbo Frame: 9216bytes

Transfer mode: Store and forward

MTBF: 100000 Hours

Network Protocol:

IEEE802.3 (10Base-T)

IEEE802.3u (100Base-TX)

IEEE802.3ab (1000Base-TX)

IEEE802.3x (Flow control)

PoE Protocol:

IEEE802.3af(15.4W)

IEEE802.3at(30W)

Industry Standard:

EMI: FCC Part 15 CISPR (EN55032) class A

EMS: EN61000-4-2 (ESD),

EN61000-4-4 (EFT),

EN61000-4-5 (Surge)

Network Medium:

10Base-T : Cat3, 4, 5 or above UTP(=100m)

100Base-TX : Cat5 or above UTP(=100m)

1000Base-TX : Cat5 or above UTP(=100m)

Optical Medium

Multimode optical fiber: 50/125, 62.5/125, 100/140um

Single-mode optical fiber: 8/125, 8.7/125, 9/125, 10/125um

LED Indicator: PWR (Power),1-10 Green Light (Link&Data)

PWR:

On: Powered on

Off: Powered off

1-10 Green Light (Link&Data)

On: Link normal

Off: Link blocked

Flashing: Data transmitting

DIP Switch

Default: common mode, all interfaces can communicate with each other, the transmission distance is less than 100 meters, the transmission rate is 10/100/1000M adaptive; The port AI mode is disabled

Extend: Link extension mode, 7-8 ports force 10M, link 250M (enable POE watchdog)

Structure Size

Product Dimensions: 220*161*44mm

Package Dimensions: 315*215*85mm

Product N.W: 0.88kg

Product G.W: 1.38kg

Packing Info

Carton Dimensions: 445*445*335mm

Packing Quantity: 10 PCS

Packing Weight: 14.8KG

Input Voltage: AC 100-240 V 50-60Hz

Supply Power: 52V2.3A

Power Consumption

Working Environment:

Working Temperature: -10~50°C

Storage Temperature: -40~70°C

Working Humidity: 10%~90%, non-condensing

Storage Temperature: 5%~90%, non-condensing