
Firma: PC COOL DOO
Adresa: Višegradska 26A
Telefon: 0653526116
Fax:
PIB: 104045201
E-mail: info@pccool.rs

Matična ploča 1700 Gigabyte B760M A ELITE AX

Šifra: 78674
Kategorija prozivoda: Matične ploče
Proizvođač: GIGABYTE

Cena: 24.830,00

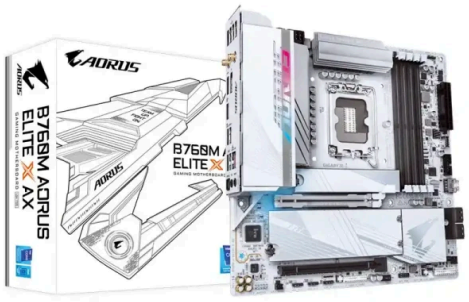

Procesorsko ležište (socket)	Intel 1700
Čipset	Intel B760
Tip memorije	DDR5
Memorijski slotovi	4
Podržane memorije	6.000MT/s (O.C.), 5.800MT/s (O.C.), 7.200MT/s (O.C.), 7.000MT/s (O.C.), 6.800MT/s (O.C.), 6.600MT/s (O.C.), 6.400MT/s (O.C.), 6.200MT/s (O.C.), 4.800MT/s, 7.600MT/s (O.C.), 7.400MT/s (O.C.), 5.600MT/s (O.C.), 5.400MT/s (O.C.), 5.200MT/s (O.C.), 4.000MT/s, 7.800MT/s (O.C.), 8.000MT/S (O.C.), 7.950MT/s (O.C), 7.900MT/s (O.C), 8.266MT/s (O.C), 8.200MT/s (O.C.)
Maksimalna ukupna memorija	192GB
Ostale osobine	Podrška za Unbuffered ECC memoriju, Podrška za Extreme Memory Profile (XMP), Dual Channel
PCI Express x16 slot	1x PCI Express 5.0 (x16 mode), 1x PCI Express 4.0 (x4 mode)
SATA priključci (ukupno)	4
SATA priključci	SATA III 6Gbps
Broj M.2 slotova	2
RAID	RAID 0, RAID 1, RAID 5, RAID 10
Žična mreža (LAN)	2.5GBase-T (Gigabit)
Model	Realtek RTL8852CE
Wi-Fi	Da
Wi-Fi standard	Wi-Fi 6 (802.11ax)
Bluetooth	Da
Bluetooth verzija	5.3
Broj kanala	8 (7.1)

Model	Realtek
Napomena	High Definition, Podrška za S/PDIF output
Broj DisplayPort priključaka	1
Broj HDMI priključaka	1
Ukupno USB priključaka	9
Ukupno USB-C priključaka	1
USB-A priključci	3x USB 5Gbps (3.2 Gen 1), 1x USB 10Gbps (3.2 Gen 2), 4x USB 2.0
USB-C priključci	1x USB 20Gbps (3.2 Gen 2x2)
RJ-45 (LAN)	1
Audio	2x 3.5mm, 1x S/PDIF optički
Ostali priključci	2x SMA antenna connectors (2T2R)
Naponski priključci	1 x 24 pin ATX Power Connector, 1 x 8-pin ATX 12V power connector, 1 x 4-pin ATX 12V power connector
USB 3.2	1 (podrška za 1 USB 3.2 Gen 2 Tip C porta), 1 (podrška za USB 3.2 Gen 1 port)
USB 2.0	2
Audio	1x Front panel audio
Ostali priključci	1x TPM Header, 2x M.2 Socket 3, 3x System Fan header, 1 x front panel header, 1 x Clear CMOS jumper, 1 x Q-Flash Plus button, 4 x SATA 6Gb/s, 2 x Thunderbolt add-in card connectors, 1 x reset jumper, 1 x reset button, 1 x 4-pin CPU Fan conector, 3x addressable RGB Gen2 LED strip headers, 1x RGB LED strip header
Napomena	Za iskorišćavanje određenih internih konektora potrebni su dodatni bracket-i ili priključci na kućištu
Format	microATX
Dimenzije	244mm x 244mm
Prava	

Cene su informativnog karaktera. Prodavac ne odgovara za tačnost cena iskazanih na sajtu, zadržava pravo izmena cena. Ponudu za ostale artikle, informacije o stanju lagera i aktuelnim cenama možete dobiti na upit. Plaćanje se isključivo vrši virmanski - bezgotovinski.