


Tenda TX2L Pro Wireless ruter Dual Band Gigabit Wi-Fi 6, OFDMA+MU-MIMO, 4L/1W fixed antenna 5x

Šifra: 86620

Kategorija proizvoda: Mrežna oprema

Proizvođač: TENDA

Cena: 3.640,00

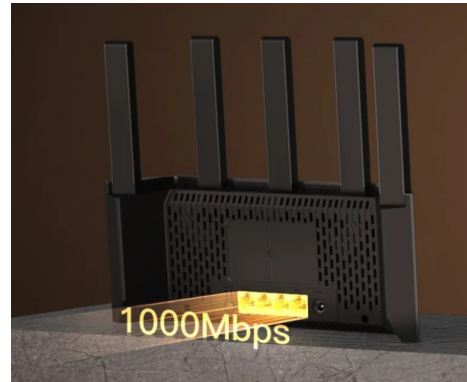

TX2L Pro je dvopojasni gigabitni Wi-Fi 6 ruter početnog nivoa dizajniran za kućne korisnike, njegova dvopojasna istovremena brzina je do 1501 Mbps (5GHz: 1201 Mbps 2,4 GHz: 300 Mbps). TX2L Pro je opremljen sa 2 modula visokih performansi i 5 eksternih antena sa visokim pojačanjem, može efikasno da poboljša prenos signala i osetljivost prijema, i proširi Wi-Fi 6 na svaki ugao vašeg doma. Podržavajući Tenda Wi-Fi+ tehnologiju, može se umrežiti sa Tenda proizvodima koji podržavaju WiFi+ jednim klikom, možete uživati u mreži.

Više uređaja se može povezati na internet u isto vreme sa manjim kašnjenjem, a efikasnost prenosa je značajno poboljšana OFDMA+MU-MIMO tehnologijom. Sa 4 Gigabit Ethernet porta, žičani uređaji se mogu povezati bržom brzinom, što osigurava da sve vrste ožičenih uređaja rade nesmetano, samo uživajte u ultra brzom mreži.

Standard&Protocol: IEEE802.3, IEEE802.3u, IEEE802.3ab

Interfaces:

1*10/100/1000Mbps WAN port

3*10/100/1000Mbps LAN ports

Antenna 5*external antennas

Button: 1*WPS/Reset button

Power:

Input: AC 100-240V~50/60Hz

Output: DC 12V1A

LED Indicator: 1* LED

Dimension: 244*56*200mm(L*W*H)

Wireless Standard:

IEEE 802.11ax/ac/n/a 5 GHz

IEEE 802.11n/b/g 2.4 GHz

Data Rate:

5GHz:1201Mbps

2.4GHz:300Mbps

Frequency

CE:

2.4G: 2412-2472MHz(CH1-CH13)

5G: 5180-5240MHz(CH36-CH64)

FCC:

2.4G: 2412-2462MHz(CH1-CH11)

5G: 5150-5250MHz(CH36-CH64)

5725-5850MHz(CH149-CH165)

Transmission Power CE:

FCC:

Basic Features: OFDMA+MU-MIMO

Beamforming Signal Directional Transmission Technology

Wireless Security:

WPA2-PSK,WPA3-SAE,WPA3-SAE/WPA2-PSK
Wireless Encryption Disable and Enable
WPS Fast Connection
Internet Connection Type: PPPOE, Dynamic IP, Static IP
Network Protocol: IPv4&IPv6
Operating Mode: Wireless Relay Mode (Client+AP)
Parental Control: Client Filter
Remote Web Management
DHCP:
DHCP Server
DHCP Client List
DHCP Static IP Address Reservation and Assignment
Virtual Server: Port Forwarding, DMZ Host, UPnP
Firewall:
ICMP Flood Attack Defense
TCP Flood Attack Defense
UDP Flood Attack Defense
Ignore Ping Packet From WAN Port
DDNS Support DynDNS, No-ip
VPN IPSec Transparent Transmission
PPTP Transparent Transmission
L2TP Transparent Transmission
PPTP VPN Server
PPTP VPN Client
L2TP VPN Client

Special Features:
Wi-Fi+(Mesh System)
IPTV
IPv6
Smart LED on/off

Other Function:
Smart Power Saving
Bandwidth Control
Guest Network
System Log
MAC Clone
Broadband Account Migration
Tenda App(Parental Control)
Backup & Restore Configurations
Support Automatic Access Detection
Upgrade Online
Operating Temperature : 0?~40?
Storage Temperature : -40C ~70?
Operating Humidity : 10 %~90% RH non-condensing
Storage Humidity : 5 %~ 90%RH non-condensing
Certification: CE, FCC,RoHS